



IAE spa
via F. Filzi 53
20032 CORMANO MI
tel. +39 02 66303255
fax +39 02 6152544
e-mail iaexray@iae.it

C40

*Rotating anode X-ray tube unit
for general diagnostic systems*

Application

Rotating anode X-ray tube unit specifically designed for 80 mm anode diameter inserts, for radiographic and fluoro procedures.



Characteristics

- Lead lined aluminium body.
- Filled under vacuum with insulating oil, specially processed.
- Two devices are present for thermal safety:
 1. a bimetallic thermal switch, internally assembled, series connected with stator common cable
 2. a pressure switch
- Storage and shipment temperature range $-10^{\circ}\text{C} \div +80^{\circ}\text{C}$
- No user maintenance requested

Inserts for reloading

- X39
- X42



Specifications

Overall length	489 mm
Maximum diameter	152 mm
Tube assembly net weight	16 kg
Nominal X-ray tube assembly voltage	125 kV
Maximum tube assembly heat content	900 kJ
Maximum continuous heat dissipation	180 W
Minimum tube assembly inherent filtration	1.0 mm Al / 75 kV
Maximum leakage radiation at 1 m from focal spots	0.44 mGy/h


C40 Rev 0 - 21.02.2013



Dimensions

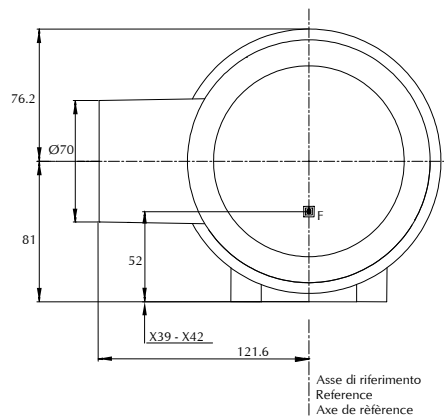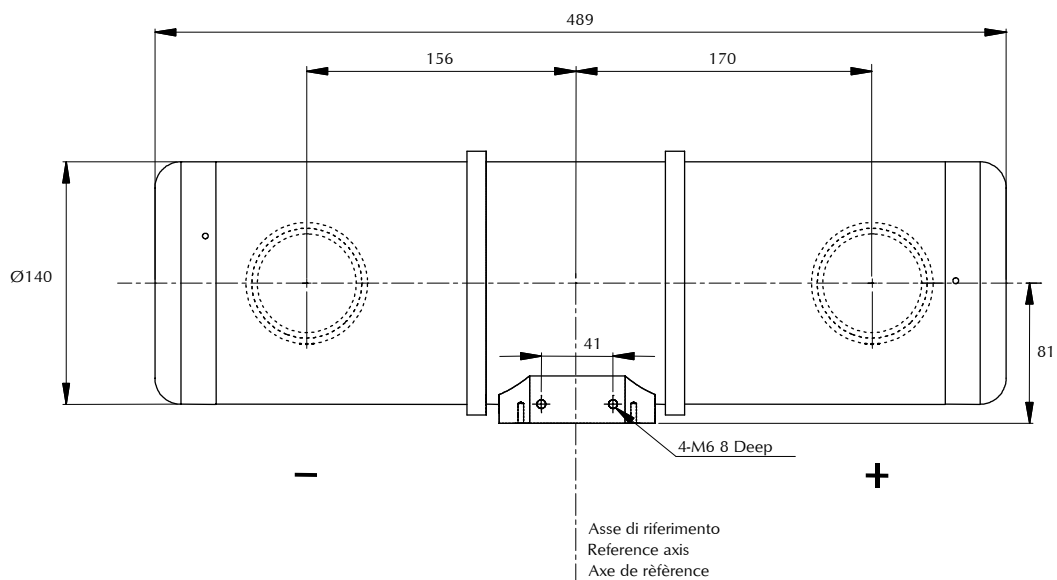

Tube assembly heating and cooling curves

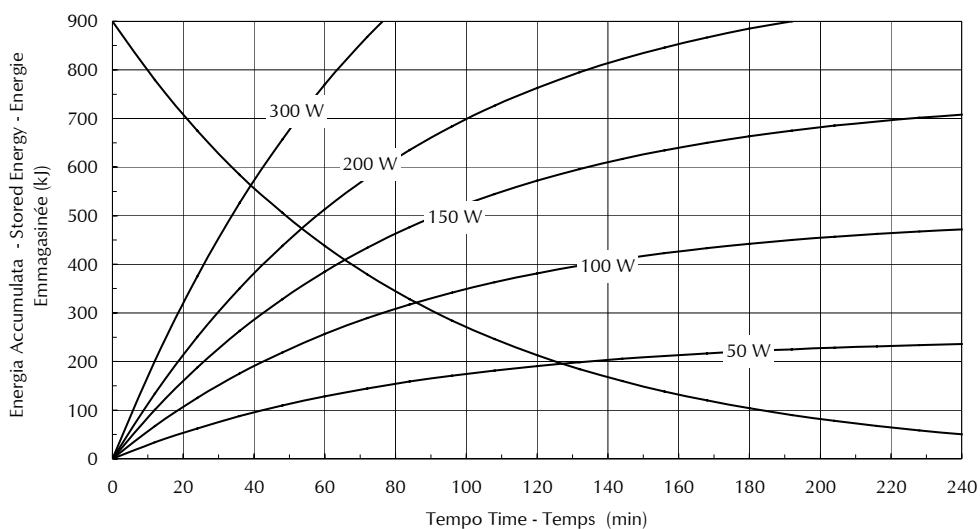

Should you have questions about the compatibility of a replacement tube unit call our customer service: +390266303255.

© copyright iae spa
Data may vary without notice



IAE spa
via F. Filzi 53
20032 Cormano MI - Italy
tel. +39 02 66303255
fax +39 02 6152544
e-mail iaexray@iae.it

